

General Features

General

Flow Rate max-min (lpm) : 5 – 50 lpm
Operating Environment : -30 / +60 C
Temp. Measurement Range : - 25 / +55°C
Relative Humidity : 95 %
Electronic Unit Safety : 220V, 50Hz 100 W

Flow Meter

4 piston positive displacement flow meter with sensitive adjustment capability
Accuracy : 0.5 %

Flow Control Valve

Monoblock two way Ex selenoid valve

Totalizers

We use 12 digits electronics totalizers for liter, money, shift-money and shift-liter, in addition to these, we use also 7 digits electromechanic totalizers according to your requests.

Electronic-Unit

Compatibility with the CANBUS technology
USB port support
Programmable electronic card
RS485 or Current-loop communication option
Compatibility with all the cash register
Compatibility with Savel multimedia module
Automatic electronic calibration
Compatibility with all the automation systems
1-wire and 2-wire special communication system
Card design according to the EMC tests
Menu systems in 6 different languages (Tr, En, Fr, Ar, Ru, Ge)
10 digits for electronic total

Keyboard

Solid keypad with 16 buttons made of stainless steel (ATM type)
Pre-Set Fill Keypads




Display

1" (25.4 mm) 6 digits for money, 6 digits for liter, 6 digits for unit price. Option one is a single screen.

Noozle and Hose

TS 9219 EN 1762 certified 5 / 8 "LPG hose
13' LPG hose (Lowstyle) or 15' LPG hose (Highstyle) with Safety Breakaways

Technical Drawings

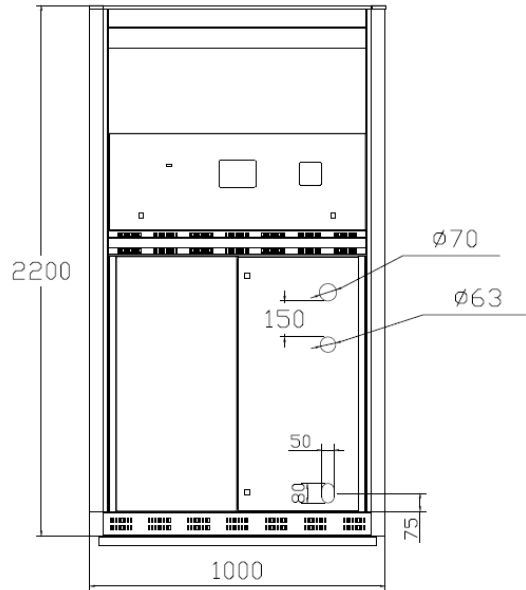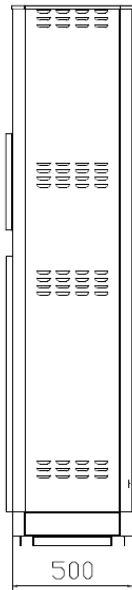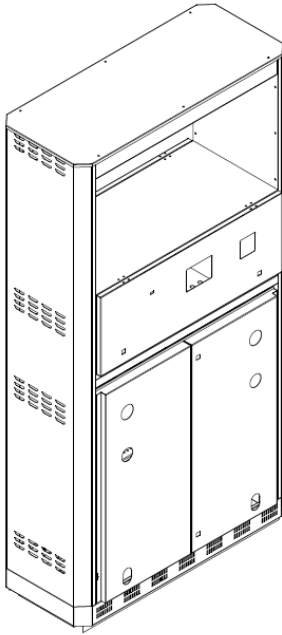

SAVEL

Ciftlik Mah. Ozgur Cad. No:2

Golcuk/ Kocaeli/TURKEY

Tel: +90 262 658 0070

Fax: +90 262 658 0071

info@savelglobal.com www.savelglobal.com

More Than Technology

+ Fuel

+ Automation

+ LPG

+ CNG